



**KOSTRZEWA®**  
Experts in heating

established in 1978

## Twin Bio

The true form of purism  
Combination of perfection  
and reliability

Platinum Bio controller with the 2<sup>nd</sup> generation  
Fuzzy Logic technology reduces fuel consumption by 20%

models [ kW ]

12 16 24



pellet



pellet / oats  
50 / 50



wood



7/24  
Manufacturer  
service



> 90%  
Boiler  
efficiency



5 class  
Equipment  
class



5 years  
5 years + extension  
of warranty  
for 2 years



GSM  
module



INTERNET  
module




Applikation  
Android



Applikation  
iOS

Designed using  
3D CAD SolidWorks Premium  
and SolidWorks Flow  
Simulation technologies

- 1 Platinum Bio burner with ceramics
- 2 insulation ceramics
- 3 combustion gas rotator reduces - temperature of the exhaust gas
- 4 ceramic chamber
- 5 grid for wood
- 6 fuel conveyor
- 7 container - 286 l volume made of galvanised tin

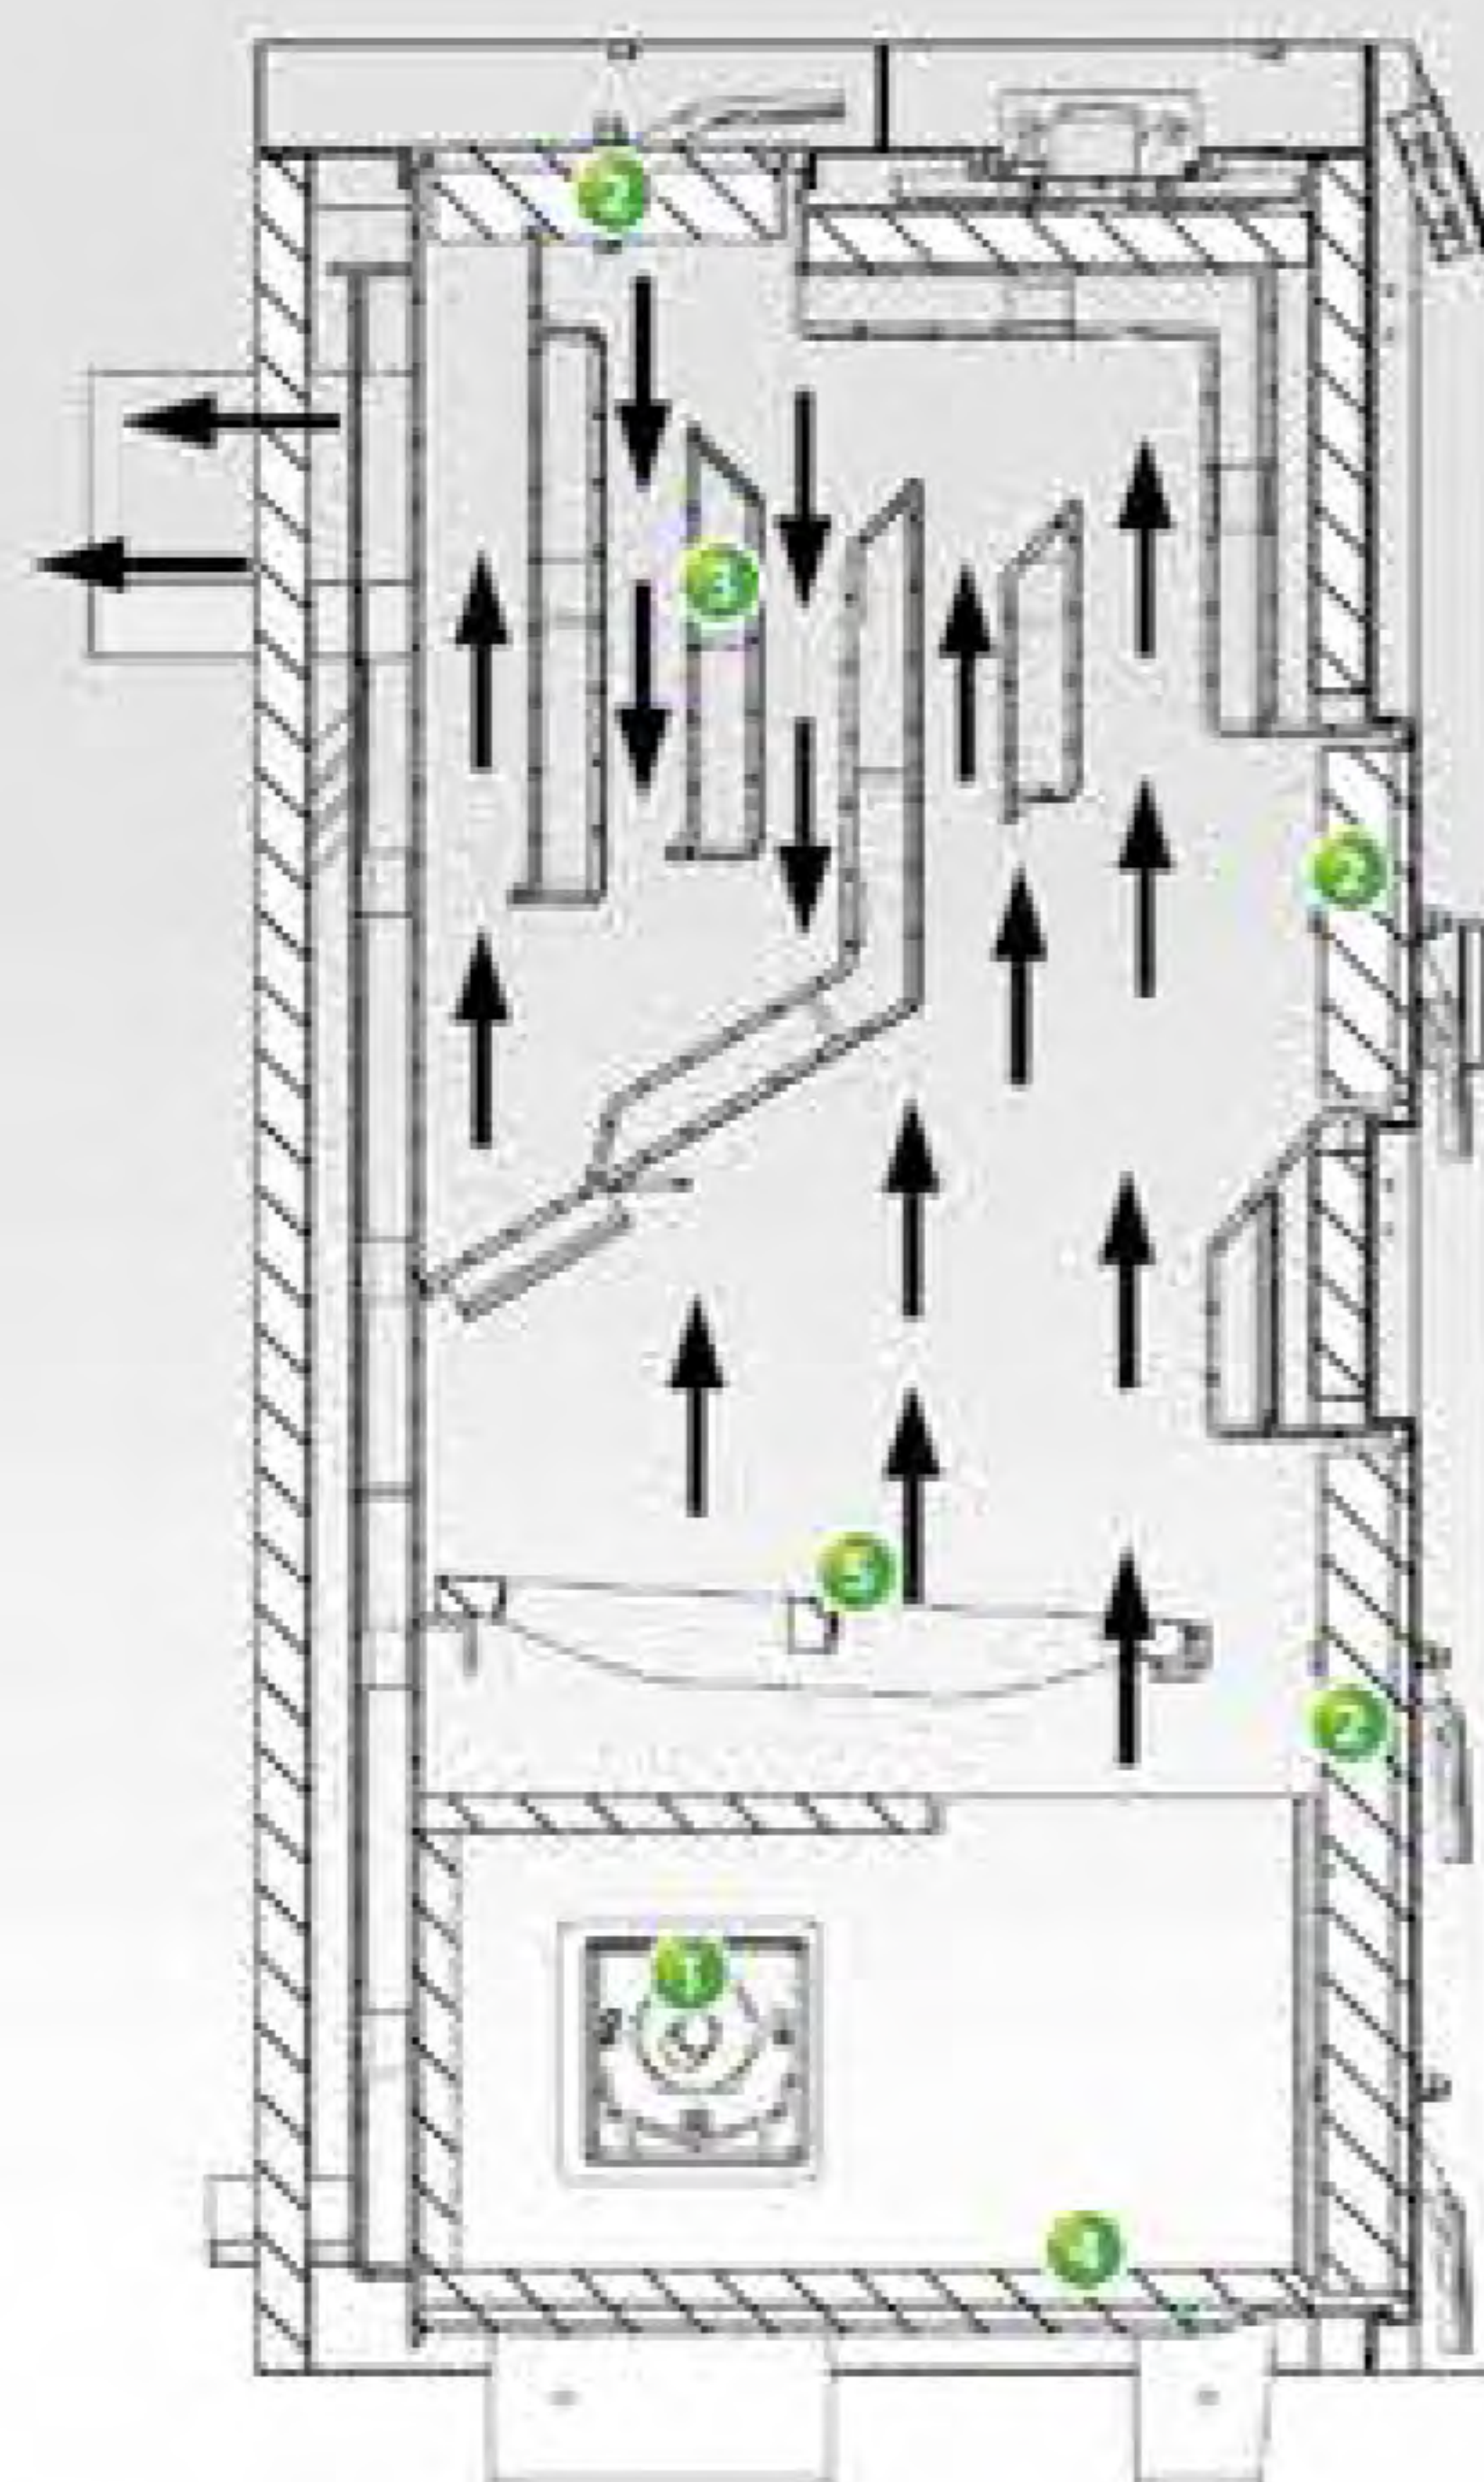

# Twin Bio

- doorstep or construction site delivery
- warranty service and post-warranty service
- 5 year warranty with a possibility to extend it by 2 years
- technician network machinery and spare part distribution network



1 litre of diesel fuel = 2 kg of granules




## Burner Platinum Bio


Economic engine of the whole system. Mechanically and technologically advanced element producing heat energy from pellets. Durable, energy saving, reliable, low-noise device manufactured from steel which allows continuous and reliable operation for many years.

## 2 generation Fuzzy Logic Platinum Bio controller

The heart of the boiler is its controller. It is a specialised electronic system, which maintains constant boiler temperature by correspondingly dosing fuel and air, but also controlling the heating system of the whole building including: heating buffer, solarium system and 16 additional heating circuits.

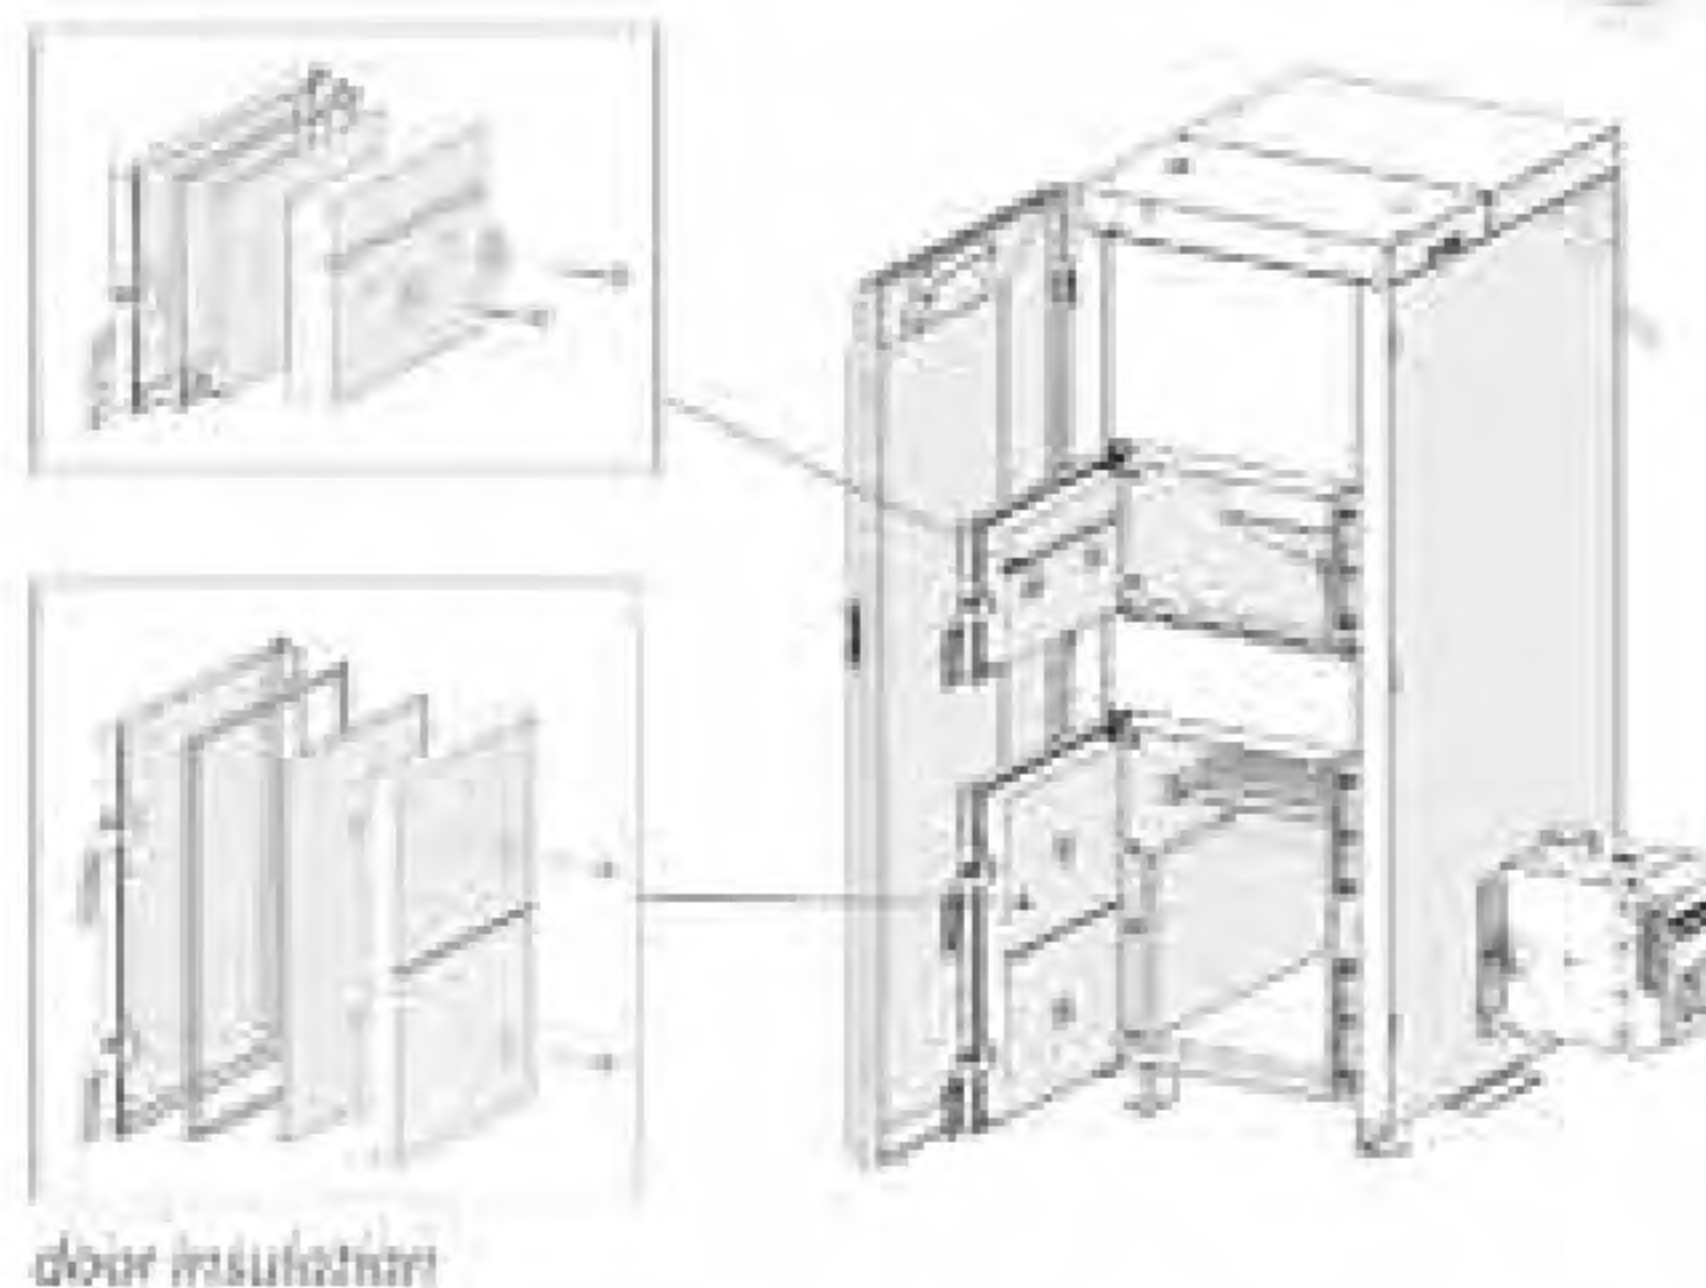

door insulation

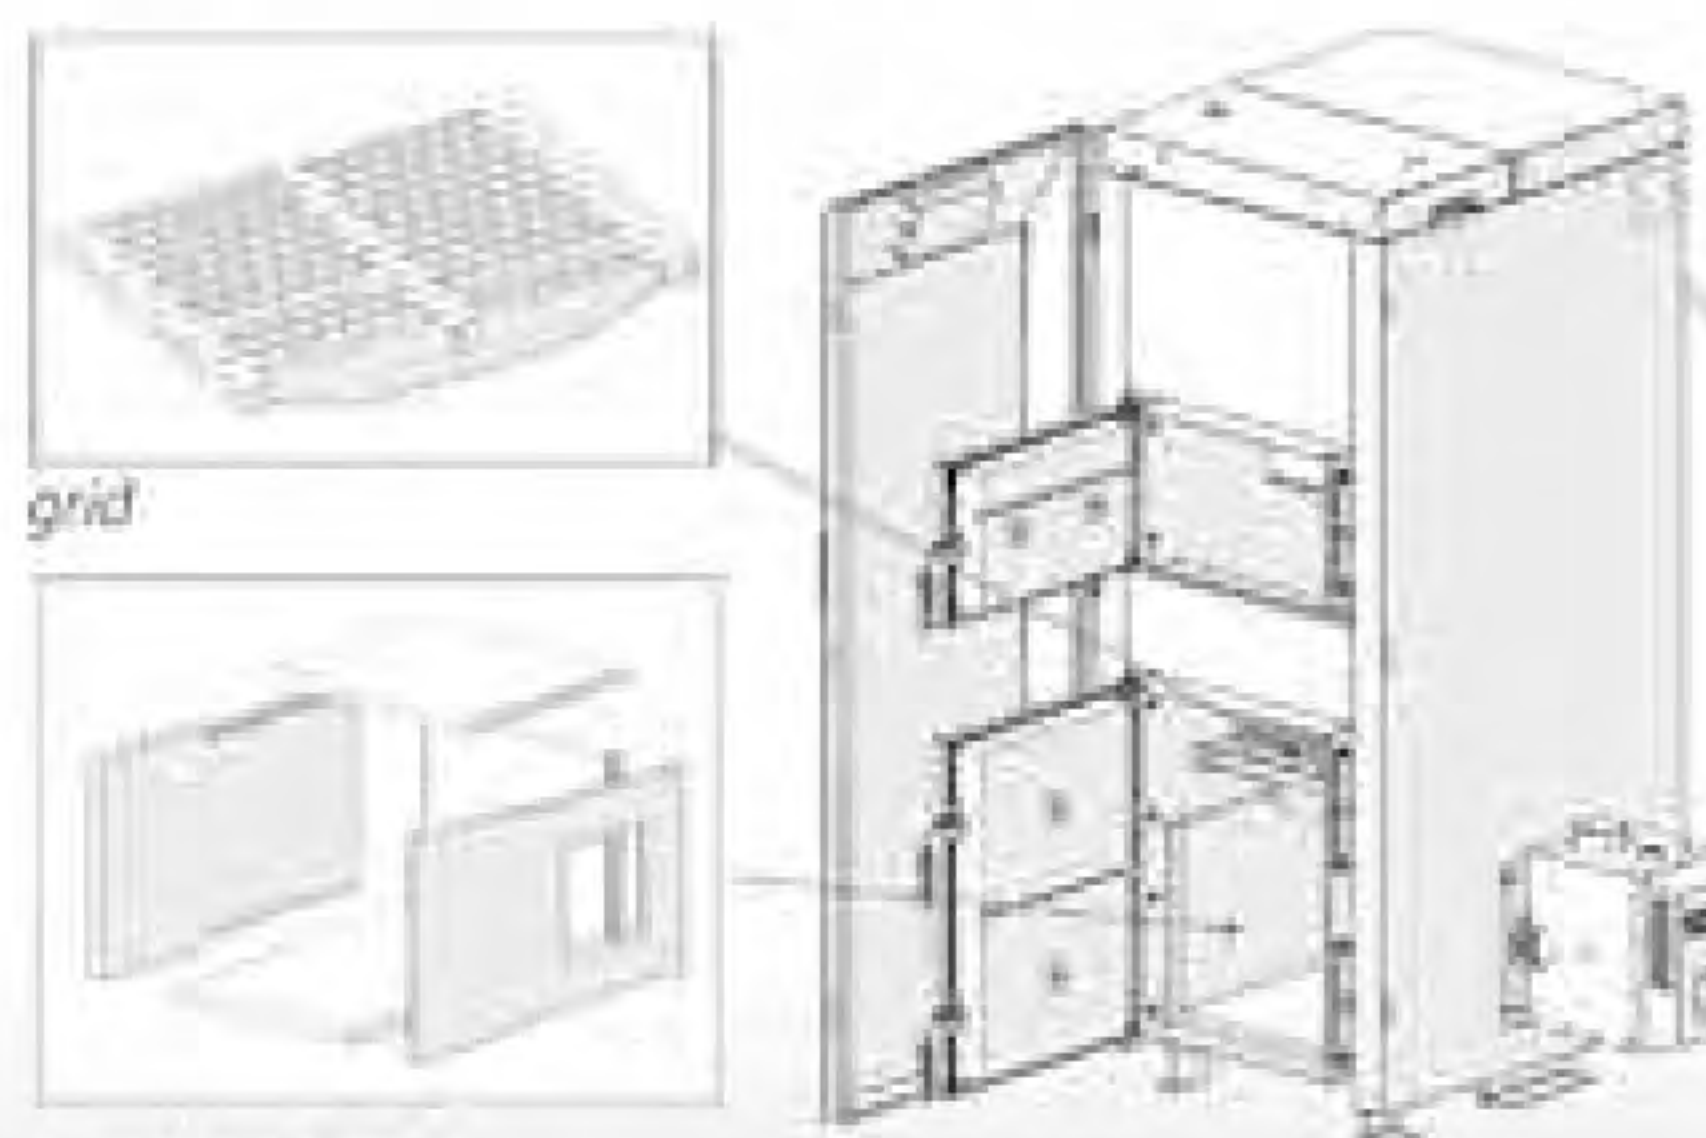

ceramic chamber

The equipment is designed to burn pellets and oats. Burnt biomass, unlike burnt coal or oil, does not emit harmful gases into atmosphere. By using renewable fuels everyone can fight the climate changes. It is manufactured of high quality materials and is additionally provided with a 3 year warranty, therefore exploitation costs can be reduced and trust in new technology can be raised.

**2 generation Fuzzy Logic regulation technology reduces fuel consumption by 20% and reduces component wear off in comparison with competitive burners.**

The main advantage of the burner is its simplicity in maintenance, comprising of filling of the main container with fuel and pressing the START button. In a few minutes the equipment will automatically ignite and will maintain constant water and room temperature.

The fuel tank is made of galvanised tin, which is highly resistant to corrosion.

If you prefer using wood, you need to select "wood" in the main controller of the heating boiler and the burner will automatically switch off and a ventilator will switch on.

### The main automated options:

- boiler temperature
- burner temperature
- room temperature - option
- hot water temperature - option
- central heating pump
- hot water pump
- two types of menus: main and advanced
- burner operation statistics
- automated fuel ignition
- choice of fuel: granules, oats, wood
- burner FL2 modulation
- supply and idle time
- menu language selection
- hot water programming
- facility heating programming
- cooperation with GSM module and INTERNET module

### Addition automation options:

- CAN module (control depending on air conditions 3 x c.h. + sensors)
- solar collector control
- buffer control (accumulator container)
- energy saving mode, when a building is empty
- control of 16 heating circuits
- lambda probe module

**Platinum Bio automation group allows to design and control the complete heating system of a building.**

Detailed technical data of the equipment are available at the manufacturer's or distributor's. The manufacturer reserves the right to alter the construction of the boiler seeking to improve operation of the equipment. The capacity of the equipment is adapted to the 4th climate zone of Poland (max. temperature: -24°C).

Type	TB 12	TB 16	TB 24
Equipment area (m <sup>2</sup> )	50-200	85-200	100-300
Power range [kW]	3,6-12	4-16	7-24
Depth (with container) [mm]	697 (920)	697 (920)	697 (920)
Width (with burner and container) [mm]	518 (1503)	518 (1503)	624 (1529)
Height [mm]	1160	1370	1370
Container volume [l]	286	286	286
Weight [kg]	270	290	319



Distributor

**KOSTRZEWA**<sup>®</sup>  
Experts in biomass heating



**BGI Ltd**  
Bio Global Industries

## Twin Bio Boilers pellet and logs

12 kW integrated 286 litre pellet store, ceramics and lambda

16 kW integrated 286 litre pellet store, ceramics and lambda

24 kW integrated 286 litre pellet store, ceramics and lambda



**KOSTRZEWA**<sup>®</sup>  
Specjaliści w ogrzewaniu  
Twin Bio

**Manual loading of woodchip and logs**



Bio Global Industries Ltd, Corporate Centre, Hunters Oak, Asheridge, Chesham, Buckinghamshire, HP5 2UU

+44 (0) 1494 757055

[info@b-g-i.co.uk](mailto:info@b-g-i.co.uk)

[www.b-g-i.co.uk](http://www.b-g-i.co.uk)